
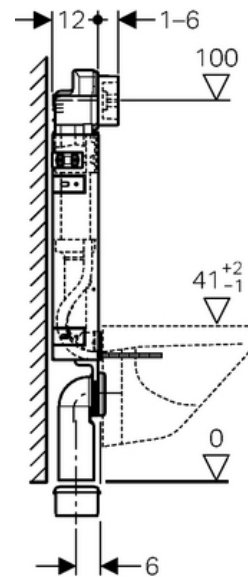


## element for wall-hung WC, 108 cm, with Delta concealed cistern 12 cm

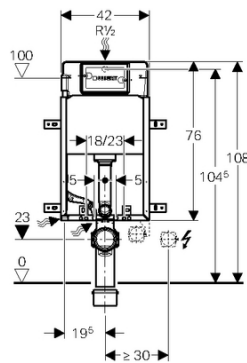

### Verwendungszwecke / Application Purposes

- For masonry walls
- For installation in part- or room-height prewall installations
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For single flush, dual flush or stop-and-go flush

### Eigenschaften / Characteristics

- Zinc-plated installation frame
- Mounting frame with four fastening brackets
- Connection bend can be mounted without tools
- Fastening for connection bend can be mounted from front
- Concealed cistern with front actuation
- Concealed cistern fully insulated against condensation
- Immediate post flush possible with factory setting
- Water supply connection, rear or top centre
- Connection hose on angle stop valve can be attached without tools
- Equipped with conduit pipe for feed pipe for connection of Geberit AquaClean shower toilets

### Technische Daten / Technical Data

Minimum flow pressure	50 kPa
Flush volume, factory setting	6 and 3 l
Flush volume large, adjustment range	4.5 / 6 / 7.5 l
Flush volume small, adjustment range	3-4 l
Calculated flow rate	0.12 l/s

### Lieferumfang / Scope of delivery

- Angle stop valve R 1/2, compatible with MeplaFix, with adapter ring
- Protection box for service opening
- 2 distance bolts
- Connection bend,  $\varnothing$  90 / 110 mm
- Connection set for WC,  $\varnothing$  90 mm
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

### Bestelltable / Order Table

Art. no.  
110.100.00.1

**Zusätzlich zu bestellen / To order additionally**

**Zubehör / Accessories**

**Interne Daten / Internal Data**

Art. no.	Material short text	Sales launch date	GS	Assortment status
110.100.00.1	KF-B WC Del12 H108 90/110 DE	2005-01-01	50	Active

**Logistik Daten / Logistic Data**

Art. no.	PU1[pc.]	PU4[pc.]	PU1 - L x W x H[mm]	VP4 - L x W x H[mm]	Gross weight[kg]	Net weight[kg]
110.100.00.1	1	12	790 x 145 x 608	1200 x 800 x 1000	7.527	6.557